


### Top features

- Displays race type, running time, split times, time and name of leading/winning athlete
- Wide angle of view & viewing distance up to 150 m
- RS422 serial transmission from OSV Photofinish camera
- Automatic or manual brightness adjustment
- Foldable wheels for easy setup and transport
- Compact storage volume
- Can be paired for a even better viewing

### Dimensions

General dimension (LxWxH): 2395 x 830 x 1145

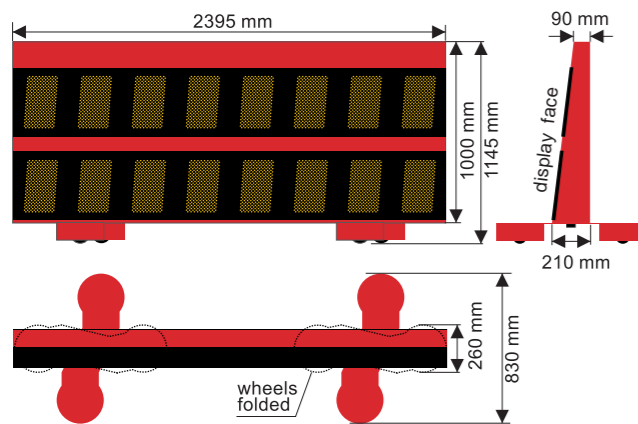

### Specifications

|                        |  |
|------------------------|--|
| Article number:        | <b>3449.920</b>  |
| Weight:                | 66.2 kg  |
| Display type:          | 2 lines of 8 characters each   |
| Digits height:         | 300 mm   |
| Digit type:            | 33 x 10 (330) pixels amber LEDs matrix   |
| Viewing distance:      | up to 150 m  |
| Viewing angle:         | 100°   |
| Power supply:          | 100-240 VAC, 50/60 Hz  |
| Power consumption:     | 130 VA max.  |
| Data connections:      | RS422 data in (Tuchel 7pF)<br>RS422 data out (Tuchel 7pF)<br>main power (Tuchel 4pM) |
| Operating temperature: | 0 to 50° C   |
| Storage temperature:   | -25 to 70° C   |
| Relative humidity:     | 90% (non condensing)   |
| Protection class:      | IP 54  |
| Certifications:        | CE and RoHS compliant  |

### Options

- 3440.900:** Wireless Bluetooth serial port adapter
- 1871.100:** Cable Tu 7pM - Tu 7pM - 100m on winder



Best Time displays are spread in all 4 corners of the field offering a perfect visibility for everyone even in the biggest stadiums



Best Time displays can be used by pairs at the finish line

### Overview



The BEST TIME display in a pair with its foldable wheels

The BEST TIME display is the ideal information panel required on the athletic field and specially at the finish line and was specially designed to fulfill those requirements. As soon as the leading or winning athlete crosses the finish line, the time is displayed and becomes immediately visible to the other athletes, the public and the medias. Its wheels allows BEST TIME to be easily installed close to the finish line or anywhere on the field, providing excellent visibility to both the athletes and the spectators. BEST TIME units can be used in pairs. The wheels can also be folded for transport. BEST TIME features two lines of eight alphanumeric characters; amber LEDs provide excellent visibility at distances of up to 150 meters. A sensor adjusts the brightness according to the ambient light conditions. BEST TIME can be linked to any timing devices such as the CHRONOS for split times or the Scan'O'Vision photo finish camera for finish times.

All the information contained in this document can be modified without warning. Swiss Timing LTD cannot be made responsible for any errors contained in this document or any damage secondary or consequent (including the loss of profits) arising from the supplying, performance or use of this product, wether it be on the base of a guarantee, a contract or any other legal ground.

3434.525.02 - D

**SWISS TIMING LTD**

A COMPANY OF THE **SWATCH GROUP**

P.O. Box 138, Rue de l'Envers 1  
Ch-2606 Corgémont - Switzerland  
www.swisstiming.com

Phone +41 32 488 36 11  
Fax +41 32 488 36 09  
info@swisstiming.com